


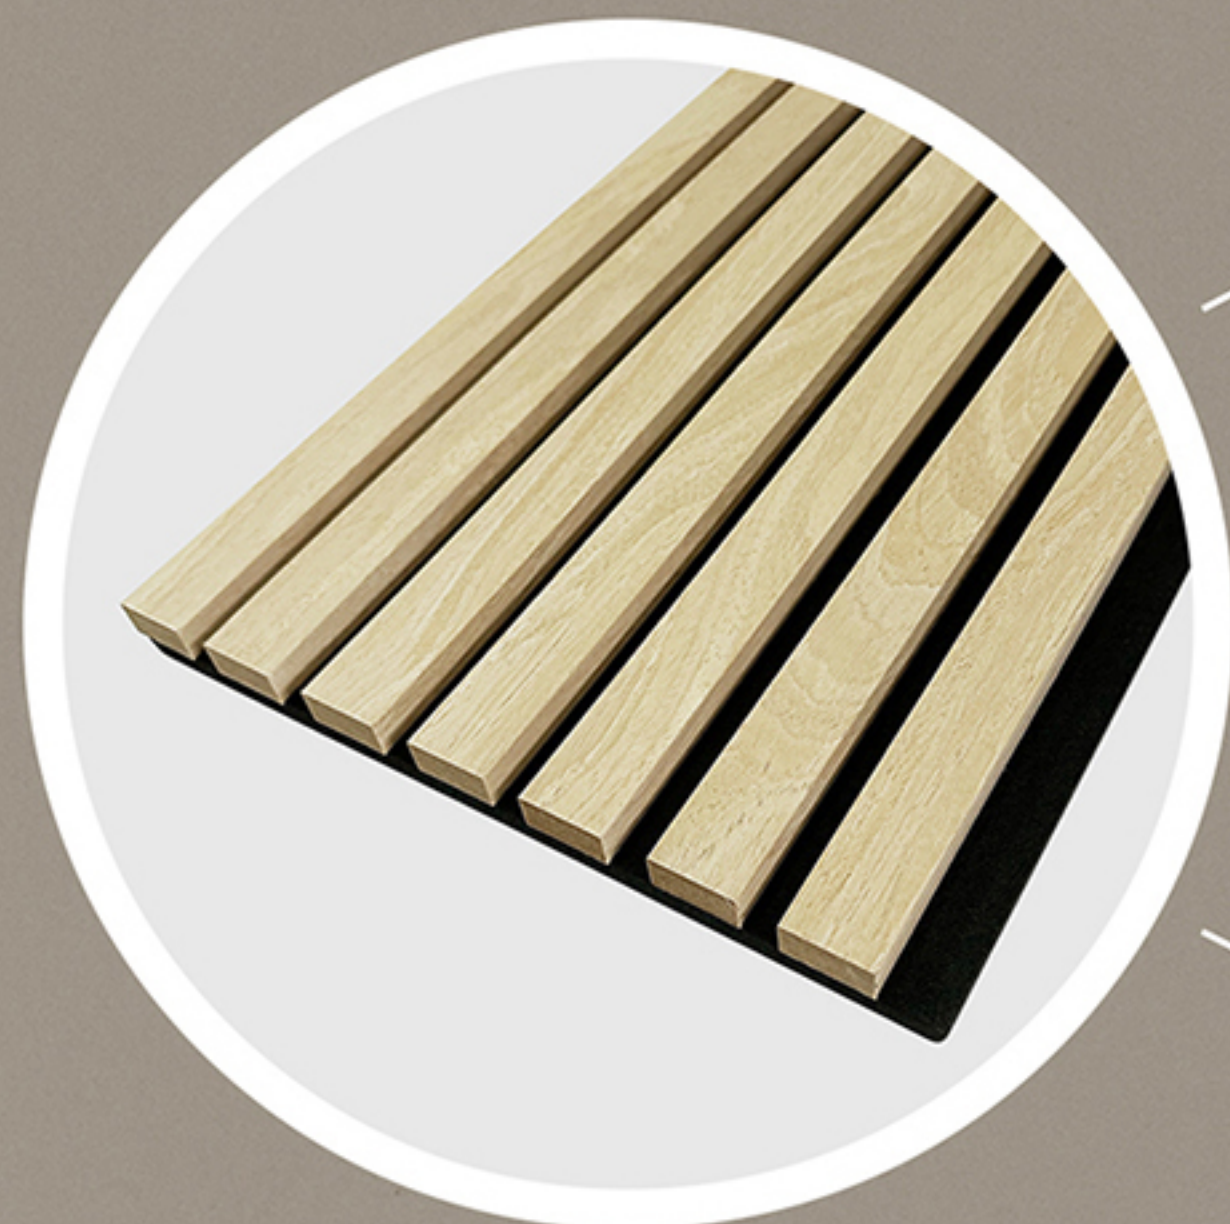

Effective noise reduction

Sound-absorbing felt mitigates noise and reduced unwanted reverberations.

Rich in color and shape

Versatile woodgrain colors and finishes to appeal to any style of home or office.

Flame retardant

The black acoustic felt can achieve B1 grade flame retardancy.

Environmental protection

CARB P2 grade medium density fiberboard protects from harmful gases and compounds.

SPECIFICATIONS

Material	MDF board & PET polyester fiber
Finish	Wood veneer
Length	2700 mm
Width	285 mm
Thickness	21mm (MDF thickness 12mm+PET felt thickness 9mm)
Eco-friendly	CARB P2
Flame restardant	EN 13501-1:2018 KLASA D-S2, DO
NRC (noise reduction coefficient)	Direct installation, NRC is 0.8; install keel, NRC is better
Clean	Clean with a vacuum cleaner or a dry cloth, not with water
Installation	Mounting glue

PANEL DIMENSIONS

