

**Test Report**

No. SDFS2309005205FF

Date: Sep.19, 2023

Page 1 of 5

**GAUDIAHOME, s.r.o.**

VYSOKOSKOLAKOV 8421/41, 010 01 ZILINA  
SLOVAKIA

**Sample Description:** ACOUSTIC WALL PANEL

**Item No.:** KN722

**Style No.:** KN722

**SKU No.:** KN722

**Country of Origin:** CHINA

**Manufacturer:** GAUDIAHOME, s.r.o.

**Supplier:** GAUDIAHOME, s.r.o.

**Buyer:** GAUDIAHOME, s.r.o.

**Tested surface:** WOOD GRAIN SURFACE

The above data and information was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion.

\*\*\*\*\*

**SGS Ref No.:** SDHL2309015739HI

**Sample Receiving Date:** Sep.04, 2023

**Test Performing Date:** Sep.04, 2023 to Sep.19, 2023

**Test Requested:**

EN 13501-1:2018 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests.

**Test Results:** -- See attached sheet --

Signed for and on behalf of  
Shunde Branch  
SGS-CSTC Co., Ltd.

Ada

Ada Liu  
Approved signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

1-2F, Building 1, Europeen Industrial Park, No.1, Shunde South Road, Waihai, Daliang, Shunde District, Foshan, Guangdong, China 528300

t (86-757) 22805888

[www.sgs.com](http://www.sgs.com)

中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一厂厂房首层, 二层 邮编: 528300

t (86-757) 22805888

[sgs.china@sgs.com](mailto:sgs.china@sgs.com)

**I. Test conducted**

This test is conducted as per EN 13501-1:2018 Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests. And the test methods as following:

1. EN 13823:2020+A1:2022 Reaction to fire tests for building products - Building products excluding floorings exposed to the thermal attack by a single burning item .
2. EN ISO 11925-2:2020 Reaction to fire tests — Ignitability of products subjected to direct impingement of flame — Part 2: Single-flame source test.

**II. Details of classified product**

Sample Description	Board
Color	Brown + Black
Thickness	Max: 22mm, Min: 9.0mm
Area density	9.83kg/m <sup>2</sup>

**Mounting and fixing:**

Test substrate was calcium silicate board meets the requirement of EN13501-1 ,of Class A2-s 1 ,d0, the density of 900 kg/m<sup>3</sup> and thickness of 10mm.

Specimen was installed on the substrate by screw. There was no joint between specimens. Specimen had a distance of at least 80mm from the backing board.

**III. Test results**

Test methods	Parameter	Number of tests	Results
EN 13823	FIGRA <sub>0.2MJ</sub> (W/s)	3	246.2
	FIGRA <sub>0.4MJ</sub> (W/s)		246.2
	Whether lateral flame spread (LFS) to the edge of specimen (Yes/No)		No
	THR <sub>600s</sub> (MJ)		14.7
	SMOGRA (m <sup>2</sup> /s <sup>2</sup> )		131.6
	TSP <sub>600s</sub> (m <sup>2</sup> )		299.1
	Flaming particles or droplets (Yes/No)		No
EN ISO 11925-2 Exposure = 30 s	F <sub>s</sub> ≤150mm within 60 s (Yes/No)	12	Yes
	Ignition of the filter paper (Yes/No)		No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

1-2F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Dailing, Shunde District, Foshan, Guangdong, China 528300

t (86-757) 22805888

[www.sgs.com](http://www.sgs.com)

中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一厂厂房首层·二层 邮编: 528300

t (86-757) 22805888

[sgs.china@sgs.com](mailto:sgs.china@sgs.com)

**Note:**

- FIGRA<sub>0.2MJ</sub> - Fire growth rate index at THR threshold of 0,2 MJ [W/s]
- FIGRA<sub>0.4MJ</sub> - Fire growth rate index at THR threshold of 0,4 MJ [W/s]
- THR<sub>600s</sub> -Total heat release within 600 s [MJ]
- SMOGR - Smoke growth rate [m<sup>2</sup>/s<sup>2</sup>]
- TSP<sub>600s</sub>- Total smoke production within 600 s [m<sup>2</sup>]

**IV. Classification and field of application**

**a) Reference of classification**

This classification has been carried out in accordance with **EN 13501-1:2018**.

**b) Classification**

The product, Acoustic wall panel (as described by the sponsor), in relation to its reaction to fire behaviour is classified:

Fire behaviour		Smoke production			Flaming droplets	
<b>C</b>	-	<b>s</b>	<b>2</b>	,	<b>d</b>	<b>0</b>

**Reaction to fire classification: C – s2, d0**

**Remark:** The classes with their corresponding fire performance are given in annex A.

**c) Field of application**

This classification is valid for the following product parameters:

--- Characteristics as described in section II of this test reports.

This classification is valid for the following end use applications:

- With all substrates classified as A1 or A2
- With mechanically fixing
- No joint

**Limitations**

This classification document does not represent type approval or certification of the product.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

1-2F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Dailing, Shunde District, Foshan, Guangdong, China 528300 t (86-757) 22805888 www.sgs.com.cn  
 中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一厂厂房首层、二层 邮编: 528300 t (86-757) 22805888 sgs.china@sgs.com

**Warning:**

The test laboratory has, therefore, played no part in sampling the product for the test, although it holds appropriate references, supplied by the manufacturer, to provide for traceability of the samples tested.

**Statement:**

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

Note: This document cannot be reproduced except full, without prior written approval of the Company.

**Annex A**

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)	Classification criteria	Additional classification
A1	EN ISO 1182 <sup>a</sup> and	$\Delta T \leq 30^{\circ}\text{C}$ , and $\Delta m \leq 50\%$ , and $t_f = 0$ (i.e. no sustained flaming)	-
	EN ISO 1716	$PCS \leq 2.0\text{MJ/kg}$ <sup>a</sup> and $PCS \leq 2.0\text{MJ/kg}$ <sup>b,c</sup> and $PCS \leq 1.4\text{MJ/m}^2$ <sup>d</sup> and $PCS \leq 2.0\text{MJ/kg}$ <sup>e</sup>	-
A2	EN ISO 1182 <sup>a</sup> or	and $\Delta T \leq 50^{\circ}\text{C}$ , and $\Delta m \leq 50\%$ , and $t_f \leq 20\text{ s}$	-
	EN ISO 1716		
	EN 13823	$FIGRA_{0.2M} \leq 120\text{W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 7.5\text{MJ}$	Smoke production <sup>f</sup> and Flaming droplets/particles <sup>g</sup>
B	EN 13823 and	$FIGRA_{0.2M} \leq 120\text{W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 7.5\text{MJ}$	Smoke production <sup>f</sup> and Flaming droplets/particles <sup>g</sup>
	EN ISO 11925-2 <sup>i</sup> Exposure = 30s	$F_s \leq 150\text{mm}$ within 60s	
C	EN 13823 and	$FIGRA_{0.4M} \leq 250\text{W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 15\text{MJ}$	Smoke production <sup>f</sup> and Flaming droplets/particles <sup>g</sup>
	EN ISO 11925-2 <sup>i</sup> Exposure = 30s	$F_s \leq 150\text{mm}$ within 60 s	
D	EN 13823 and	$FIGRA_{0.4M} \leq 750\text{W/s}$	Smoke production <sup>f</sup> and



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

1-2F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daxing, Shunde District, Foshan, Guangdong, China 528300

t (86-757) 22805888

[www.sgs.com](http://www.sgs.com) or [www.sgs.com.cn](http://www.sgs.com.cn)

中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号楼首层、二层 邮编: 528300


t (86-757) 22805888

[sgs.china@sgs.com](mailto:sgs.china@sgs.com)

	EN ISO 11925-2 <sup>i</sup> Exposure=30s	$F_s \leq 150\text{mm}$ within 60 s	Flaming droplets/particles <sup>g</sup>
E	EN ISO 11925-2 <sup>i</sup> Exposure =15s	$F_s \leq 150\text{mm}$ within 20 s	flaming droplets/particles <sup>h</sup>
F	EN ISO 11925-2 <sup>i</sup> Exposure = 15 s	$F_s > 150\text{mm}$ within 20 s	

- <sup>a</sup> For homogeneous products and substantial components of non-homogeneous products.
- <sup>b</sup> For any external non-substantial component of non-homogeneous products.
- <sup>c</sup> Alternatively, any external non-substantial component having a  $PCS \leq 2,0 \text{ MJ/m}^2$ , provided that the product satisfies the following criteria of EN 13823:  $FIGRA \leq 20 \text{ W/s}$ , and  $LFS < \text{edge of specimen}$ , and  $THR_{600s} \leq 4,0 \text{ MJ}$ , and  $s_1$ , and  $d_0$ .
- <sup>d</sup> For any internal non-substantial component of non-homogeneous products.
- <sup>e</sup> For the product as a whole.
- <sup>f</sup>  $s_1 = \text{SMOGRA} \leq 30\text{m}^2/\text{s}^2$  and  $TSP_{600s} \leq 50\text{m}^2$ ;  $s_2 = \text{SMOGRA} \leq 180\text{m}^2/\text{s}^2$  and  $TSP_{600s} \leq 200\text{m}^2$ ;  $s_3 = \text{not } s_1 \text{ or } s_2$
- <sup>g</sup>  $d_0 = \text{No flaming droplets/ particles in EN 13823 within 600 s}$ ;  
 $d_1 = \text{no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s}$ ;  
 $d_2 = \text{not } d_0 \text{ or } d_1$ .
- Ignition of the paper in EN ISO 11925-2 results in a  $d_2$  classification.
- <sup>h</sup> Pass = no ignition of the paper (no classification);  
 Fail = ignition of the paper ( $d_2$  classification).
- <sup>i</sup> Under conditions of surface flame attack and, if appropriate to the end-use application of the product, edge flame attack.

### Photo Appendix:

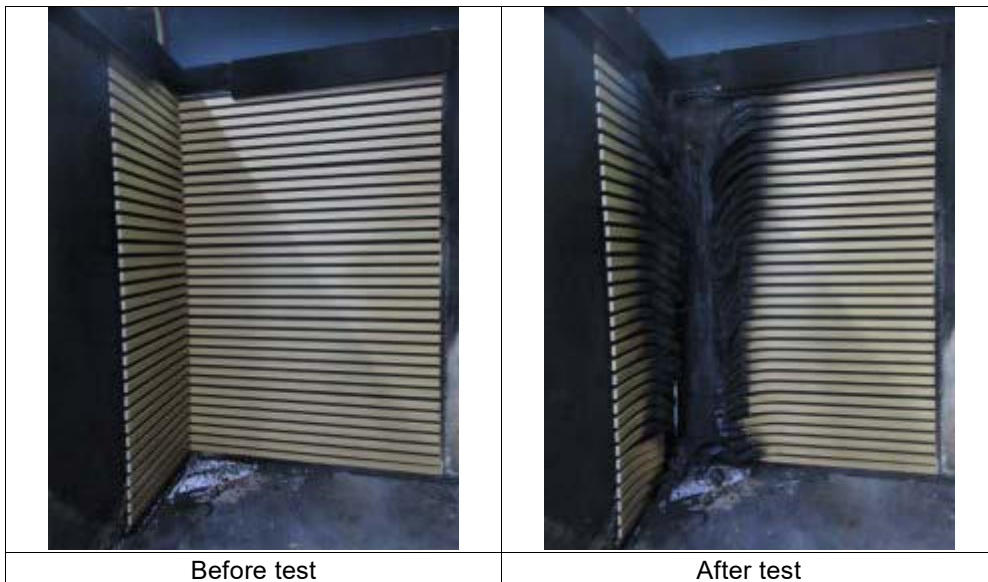

SGS authenticate the photo on original report only

\*\*\*End of Report\*\*\*



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

1-0F, Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Dailing, Shunde District, Foshan, Guangdong, China 528300

t (86-757) 22805888

[www.sgs.com](http://www.sgs.com)

中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层·二层 邮编: 528300

t (86-757) 22805888

[sgs.china@sgs.com](mailto:sgs.china@sgs.com)